

# TORQUE TESTER DI-4B-25

**The best for daily Torque check of a small impact tool, an air driver, and a high output electric driver**

## The feature of DI-4B-25

- Measurement is possible up to a maximum of 25 N·m.
- It is the number counter of blows for impact tools.
- Measurement in the state where the socket was attached is possible.



### The main functions

#### High luminosity LED display

LED is adopted as a display part.  
A numerical value can be read clearly also in a dark place.

#### Battery drive

It can be used being unable to choose a place and convenient for carrying by the spot.  
An exclusive charger is attached.

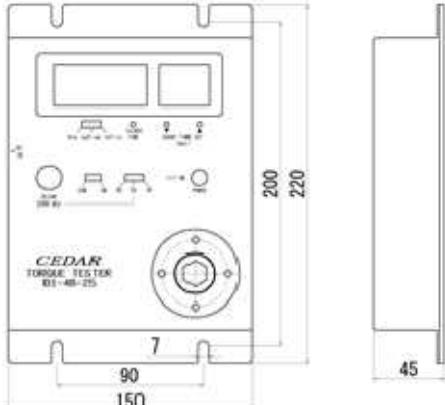

#### Auto-power-off

A power source is automatically turned off after neglect for 5 minutes.

#### Display zero clearance

The zero clearance of the measurements is automatically carried out in setting time.  
(A setup in 0.5 - 3 seconds is possible)

## Specification

Model name	DI-4B-25- Destination	Appearance figure	
Measuring range ( at the time of Track)	0.30～25 N·m 3.0～250 kgf·cm 3.0～220 lbf·in		
Accuracy	±0.5% (or less 499±3digit)		
The display method	4 figures LED display		
The measurement direction	CW-CCW (right and left) It is selection measurement by the change switch.		
Mode	Track, Peak, Peak-Down ( Operation is 70digit or more)		
Auto clear time	In 0.5 - 3.0 seconds (0.5-second interval, an indication is automatically given zero.) It is a manual zero clearance by 0.0-second setup		
Blow measurement range	Zero to 99 blow		
Blow Measurement time	0.1 - 9.9 seconds		
Data output	ASCII format (baud rate 19200)		
Appearance	Dimension: 150(W) x220(D) x74 (H)	<b>About the method of application of an attachment</b>	
	Weight: About 2.1kg		
Power supply	Ni-MH battery Auto power OFF (after [ OFF ] the neglect during 5 minutes)		
Charge time / use time	At the time of charge 6 hour /, and the maximum charge Continuation about 8-hour use	 <b>Soft joint</b> 17mm of hexagon-head-bolt opposite neighborhoods <b>Rotate about three times by the time a nut or a bolt arrives at a bearing surface and reaches all torque</b> <b>For elastic body..</b>	
The contents of a set (one piece each)	Hard joint (M10) / Soft joint (M10) / 9.5 sq. drive Socket (Hexagon head socket 17)	 <b>Hard joint</b> 17mm of hexagon-head-bolt opposite neighborhoods <b>Rotate about 1/10 by the time a nut or a bolt arrives at a bearing surface and reaches all torque.</b> <b>For rigid object.</b>	
	6.35Hex bit (Hexagon head socket 17)		
	Receipt case / AC/DC adaptor		
	Inspection-report / proofreading certificate /Traceability system figure		

Destination	Code Contents & measurement unit	Jx		Ox				
		(Used in Japan only) SI unit (N·m)		(Used in outside of Japan) SI unit (N·m)      Weight unit (kgf·cm)      Yard-pound unit (lbf·in)				
		* x specifies the AC adapter plug.						
		Code	1	2	3	4	5	
		Plug type	A type	A type(China)	C type	F type	G type	

Please check the newest information and the details of each product in a homepage. 《URL <http://www.cedar.co.jp>》

	   	<b>SUGISAKI METER CO.,LTD.</b> URL <a href="https://cedar.co.jp/en/">https://cedar.co.jp/en/</a> E-mail <a href="mailto:sales@cedar.co.jp">sales@cedar.co.jp</a>
--	--	--

The contents of a catalog may change specification and a design without a preliminary announcement.